


Data  
Assimilation  
Research  
Testbed



# Parallel Implementations of Ensemble Kalman Filters for Huge Geophysical Models

Jeffrey Anderson, Helen Kershaw, Jonathan Hendricks, Nancy Collins, Ye Feng  
NCAR Data Assimilation Research Section

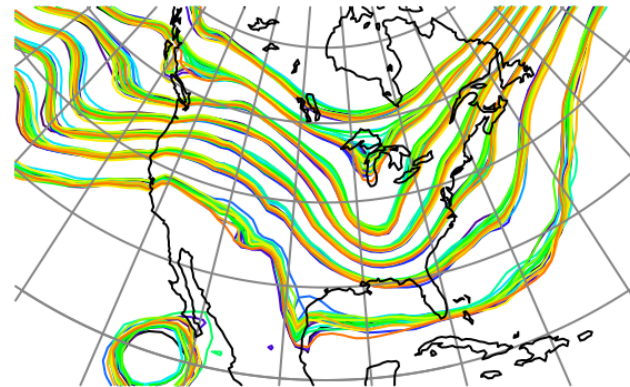

©UCAR 2014




The National Center for Atmospheric Research is sponsored by the National Science Foundation. Any opinions, findings and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

NCAR | National Center for  
UCAR | Atmospheric Research


# What is Data Assimilation?

Observations combined with a Model forecast...

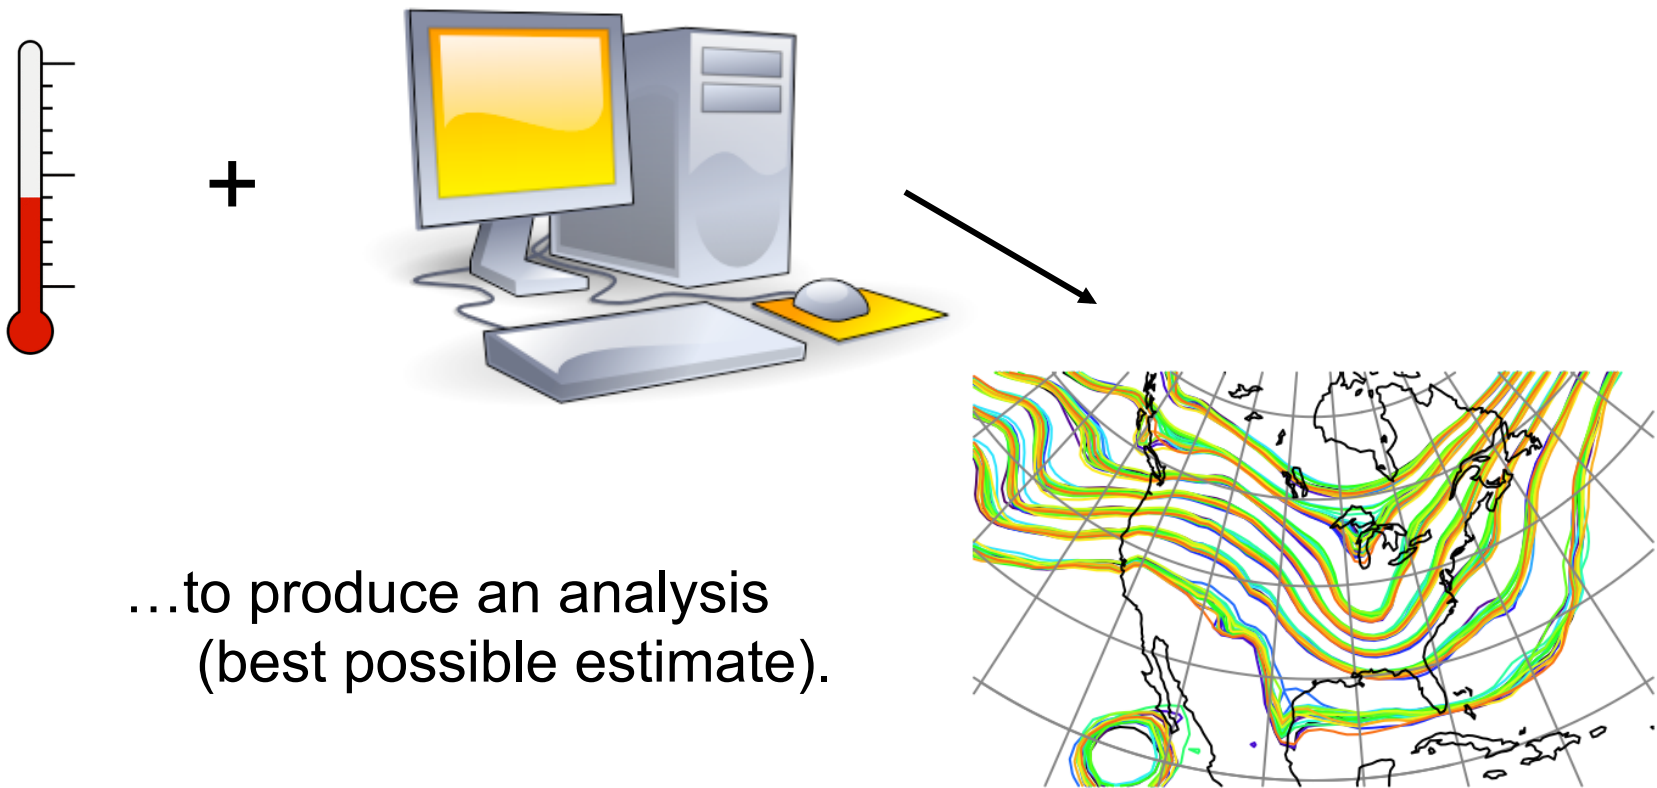

# The Data Assimilation Research Testbed (DART)

DART provides data assimilation 'glue' to build state-of-the-art ensemble forecast systems for even the largest models.

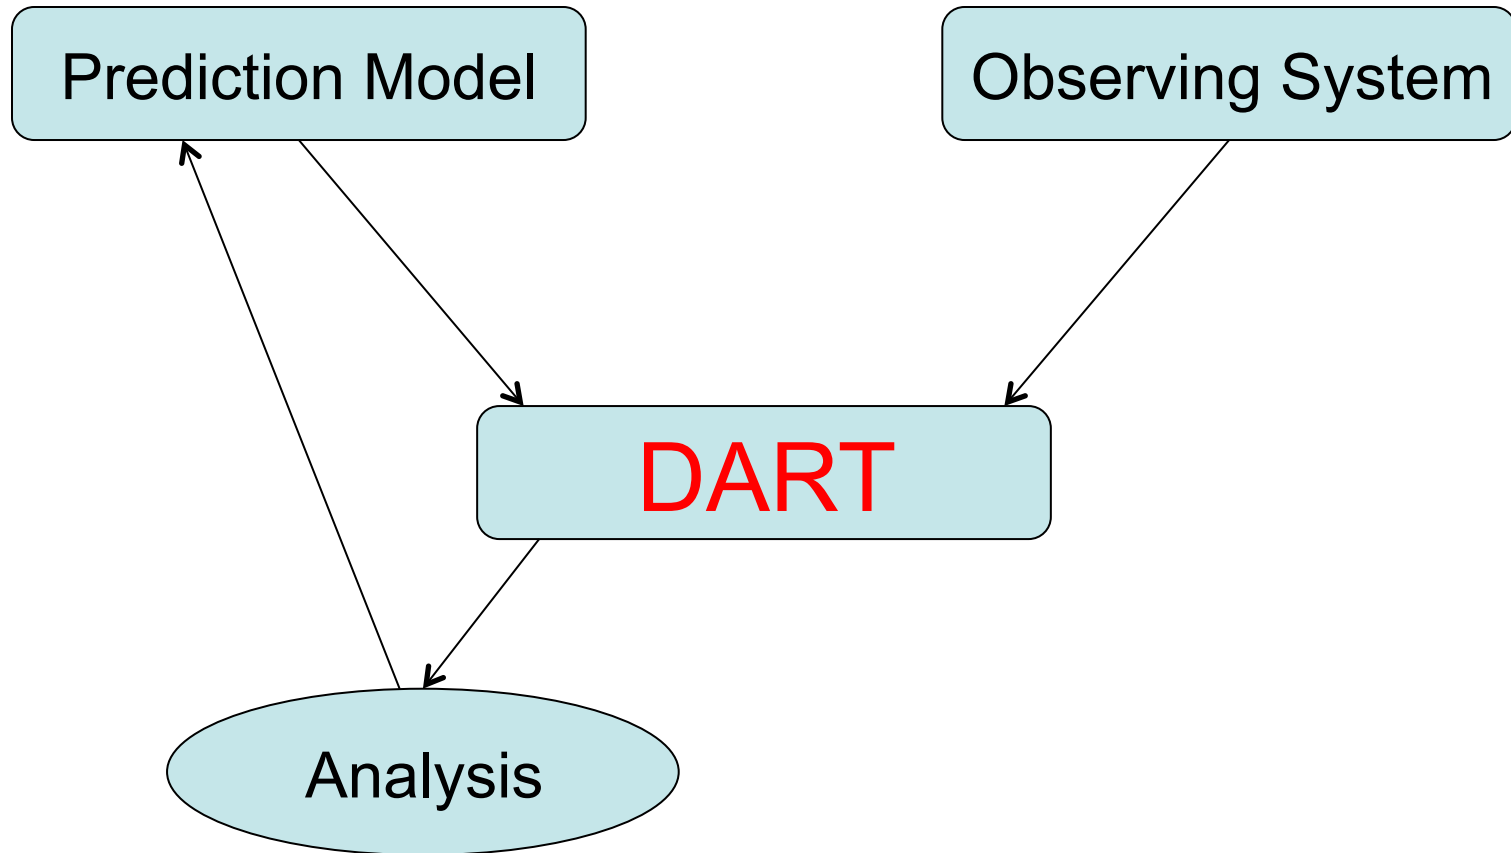

# DART Goals

Provide State-of-the-Art Data Assimilation capability to:

- Prediction research scientists,
- Model developers,
- Observation system developers,

Who may not have any assimilation expertise.

# DART Design Constraints

- **Models small to huge.**
- Few or many observations.
- Tiny to **huge computational resources.**
- Entry cost must be low.
- Competitive with existing methods for weather prediction:  
Scientific quality of results,  
**Total computational effort must be competitive.**

# How an Ensemble Filter Works for Geophysical Data Assimilation

1. Use model to advance **ensemble** (3 members here) to time at which next observation becomes available.

Ensemble state  
estimate after using  
previous observation  
(analysis)

$t_k$




Ensemble state  
at time of next  
observation  
(prior)

$t_{k+1}$



# How an Ensemble Filter Works for Geophysical Data Assimilation


2. Get prior ensemble sample of observation,  $y = h(x)$ , by applying forward operator  $h$  to each ensemble member.

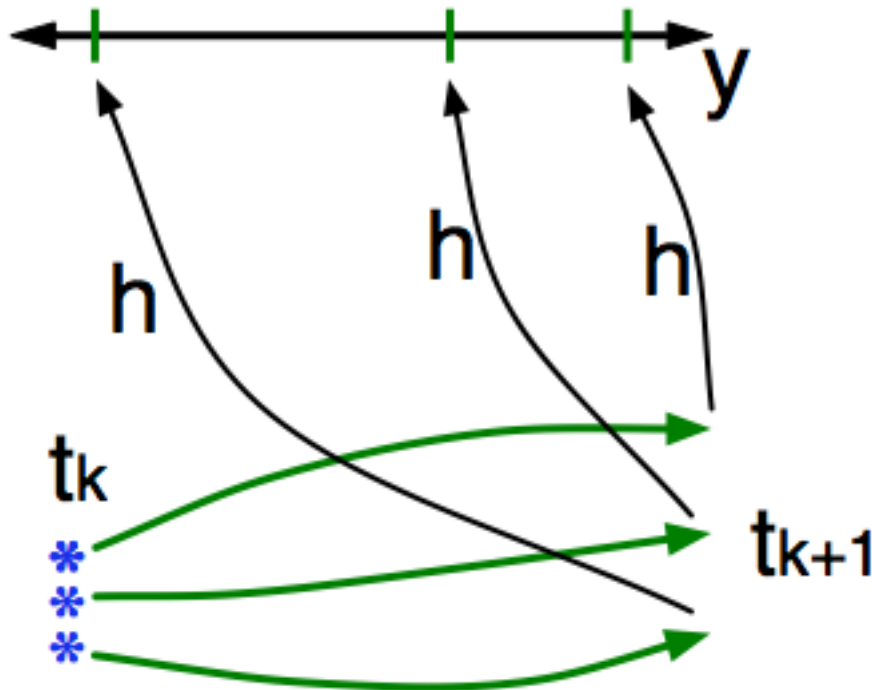

Theory: observations from instruments with uncorrelated errors can be done sequentially.

# How an Ensemble Filter Works for Geophysical Data Assimilation


3. Get **observed value** and **observational error distribution** from observing system.

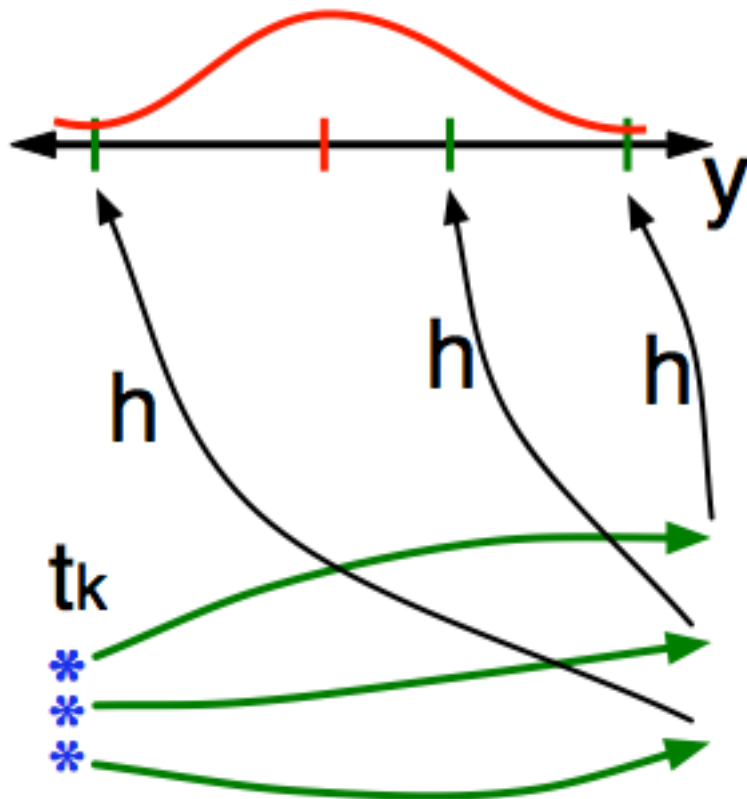




# How an Ensemble Filter Works for Geophysical Data Assimilation

- Find the **increments** for the prior observation ensemble (this is a scalar problem for uncorrelated observation errors).

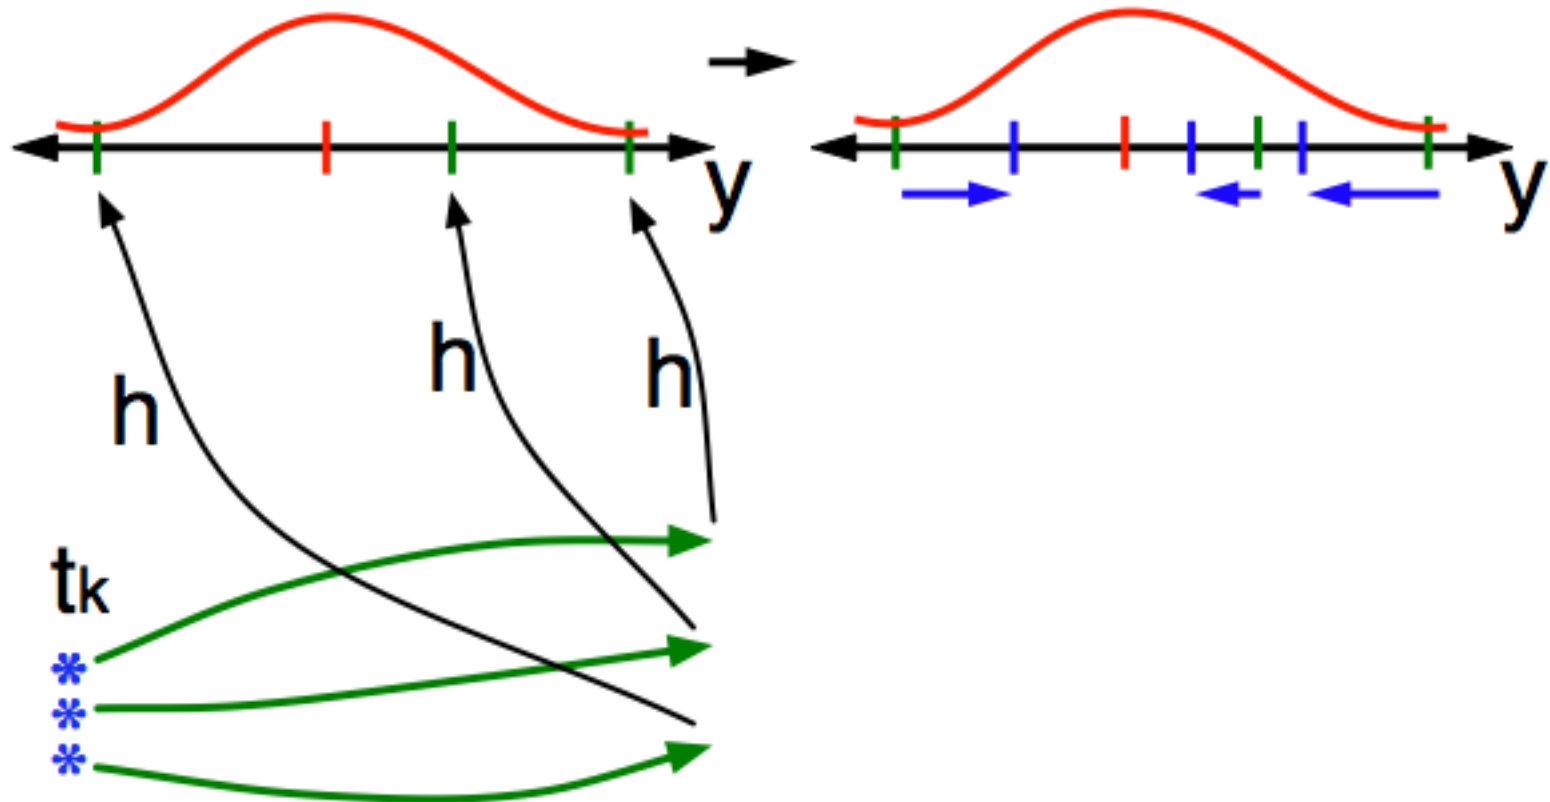


# How an Ensemble Filter Works for Geophysical Data Assimilation

5. Use ensemble samples of  $y$  and each state variable to linearly regress observation increments onto state variable increments.

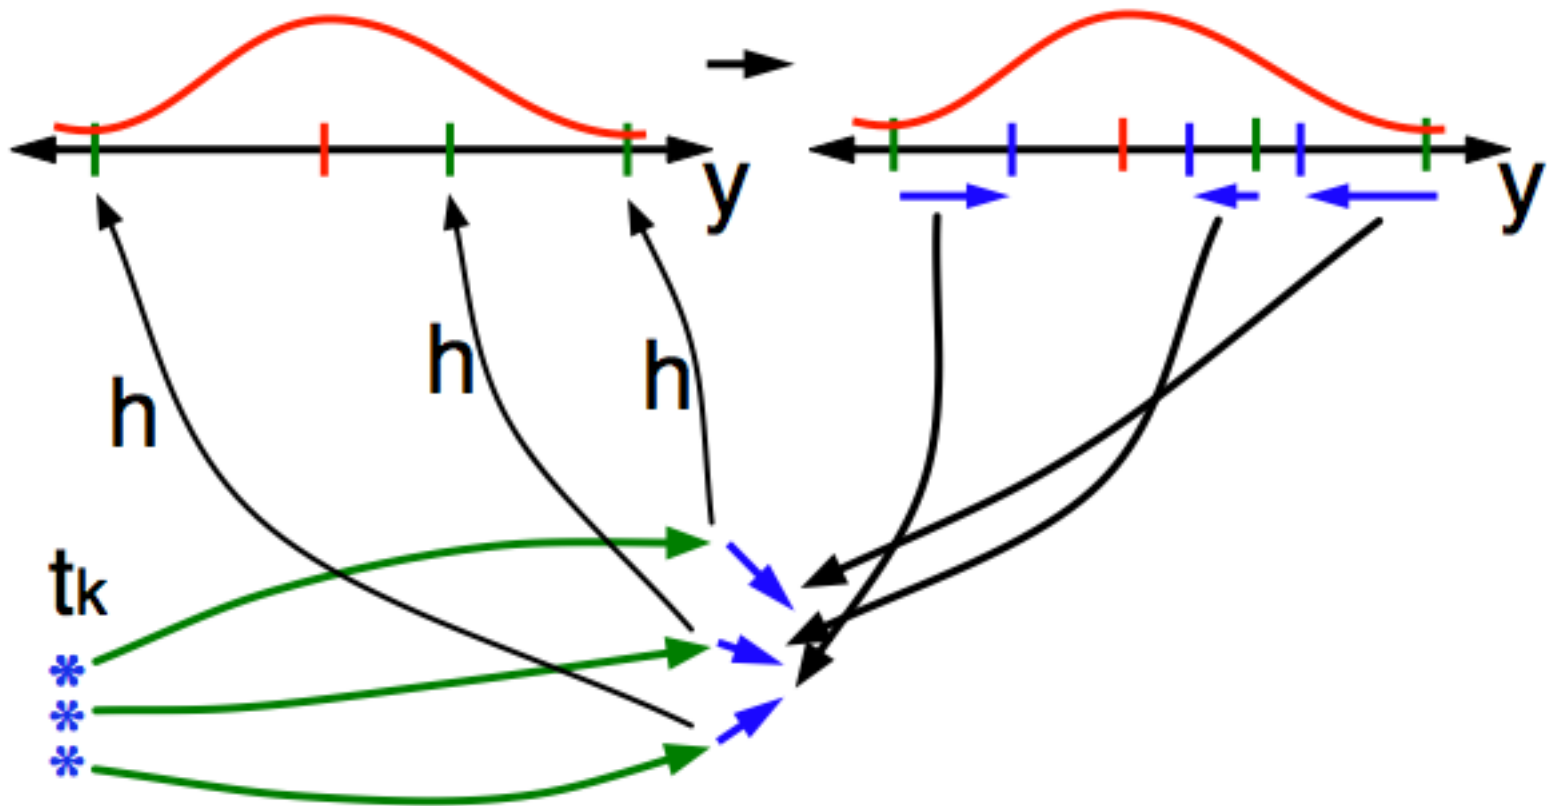


# How an Ensemble Filter Works for Geophysical Data Assimilation

5. Use ensemble samples of  $y$  and each state variable to linearly regress observation increments onto state variable increments.

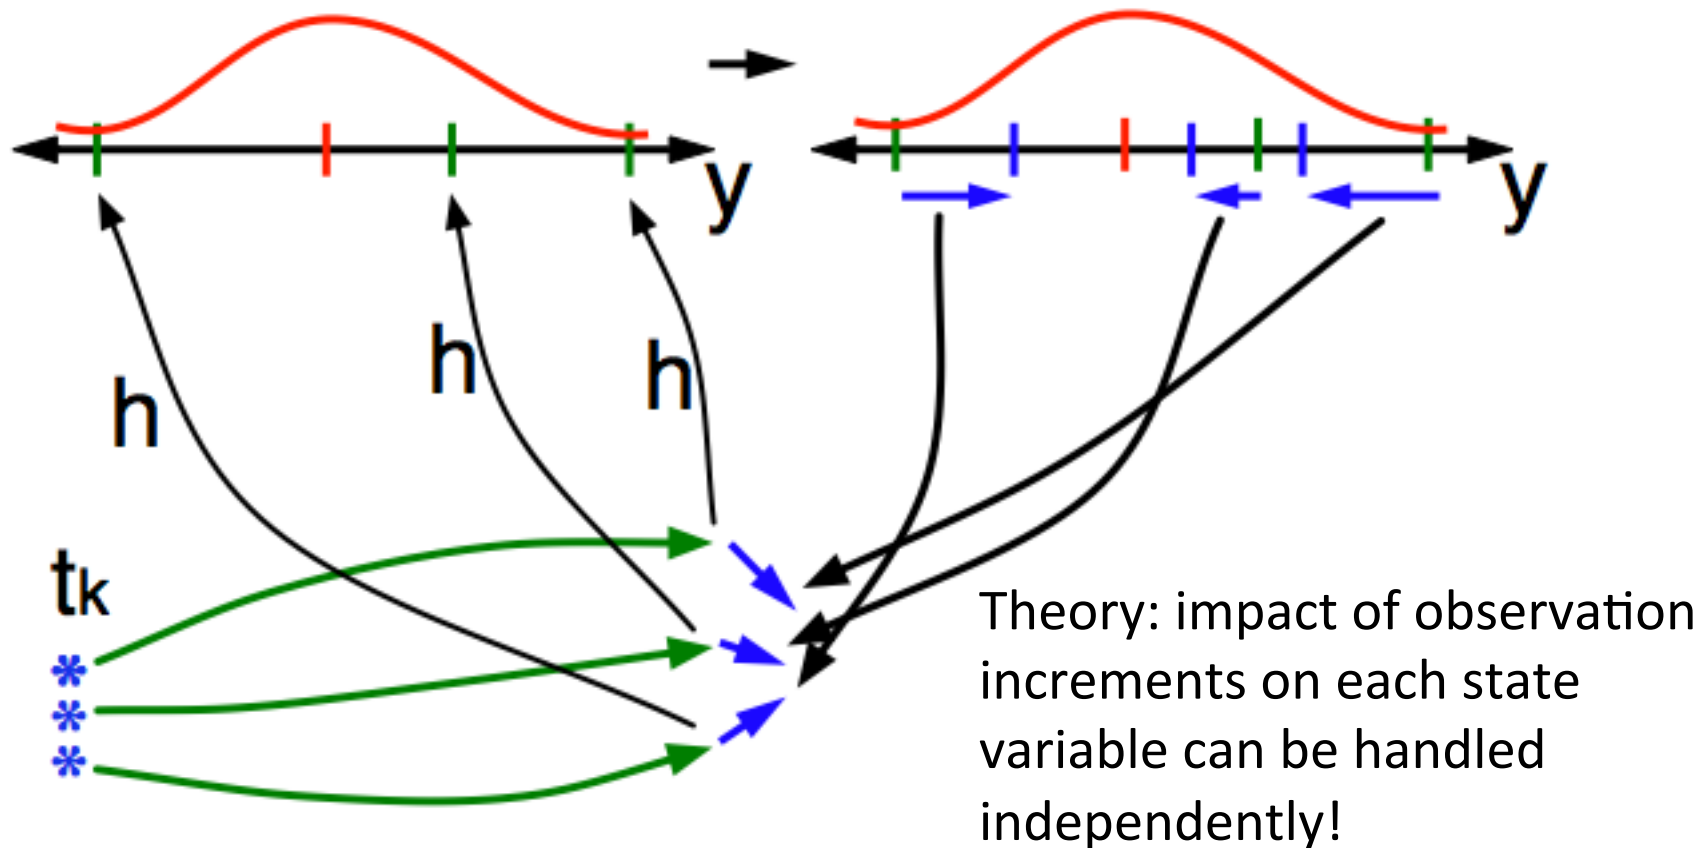


# How an Ensemble Filter Works for Geophysical Data Assimilation

- When all ensemble members for each state variable are updated, integrate to time of next observation ...

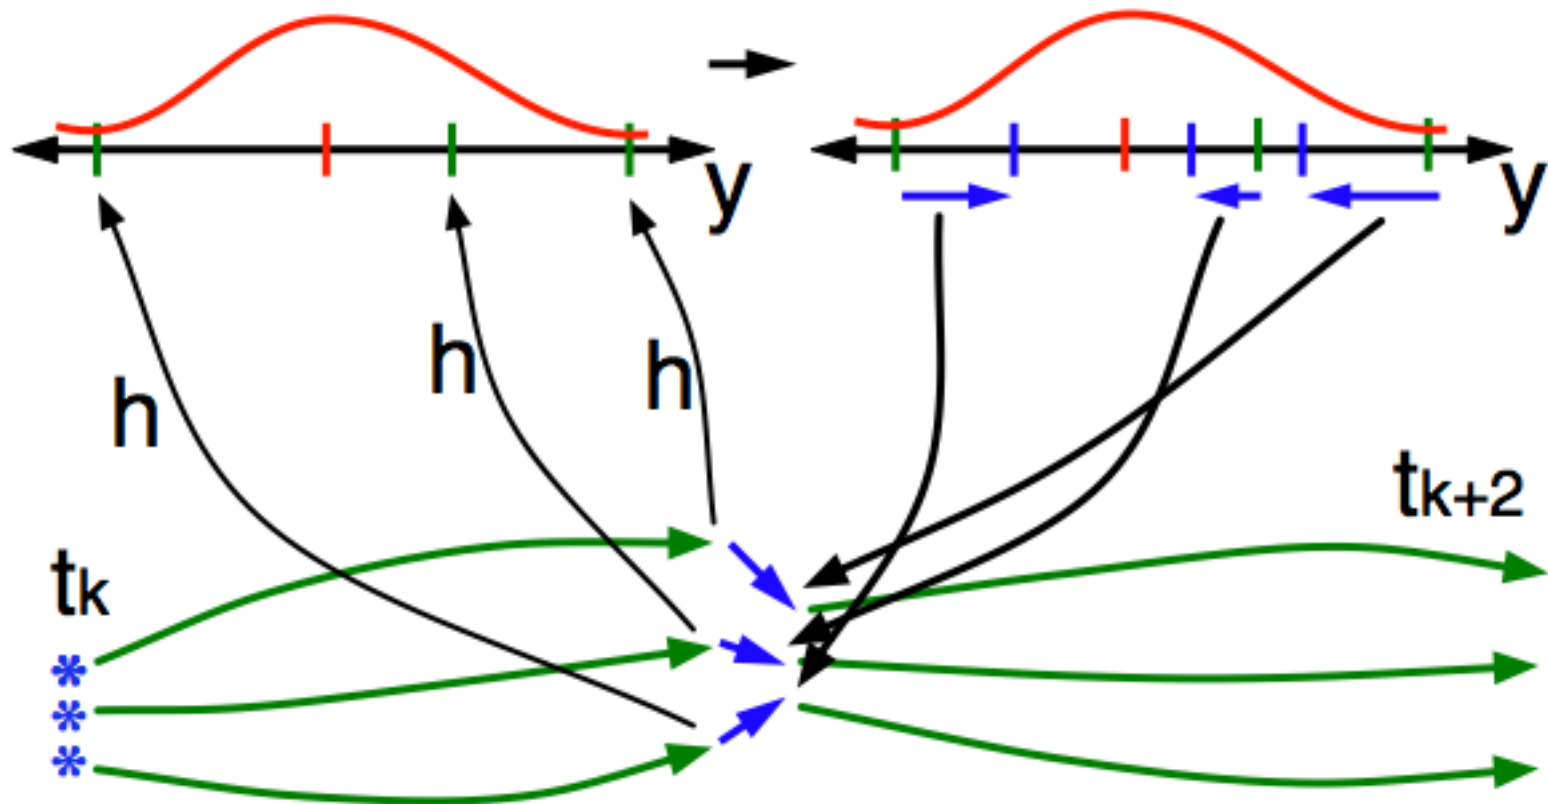

# How an Ensemble Filter Works for Geophysical Data Assimilation

For large models, regression of increments onto each state variable dominates time.

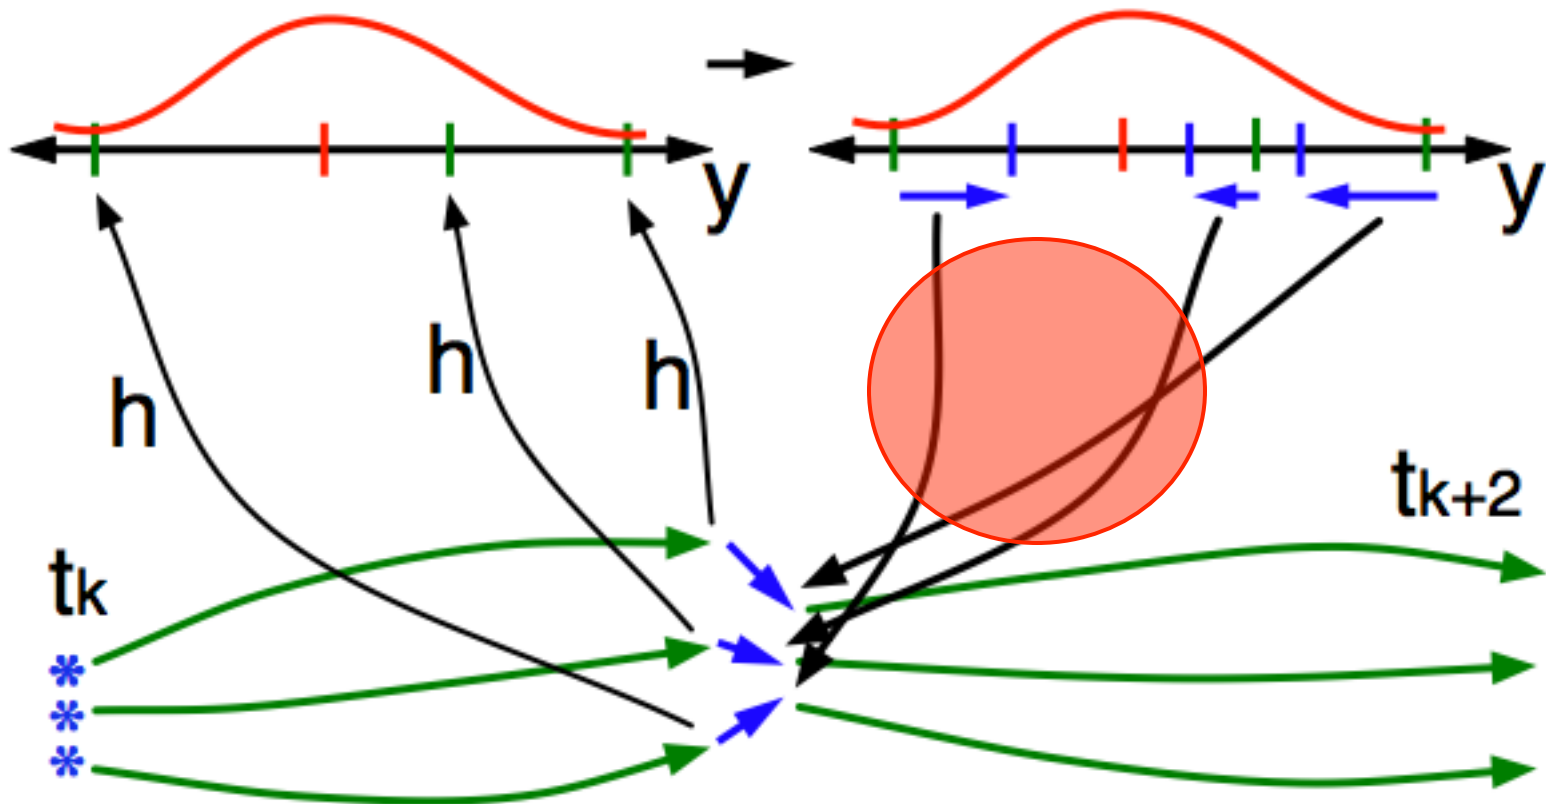

# Parallelizing Implementation of the Regression


Data layout (option 1):

Each process stores all ensemble copies of subset of state.

Simple example:

4 Ensemble members;  
4 PEs (colors).

Observation shown by red star.

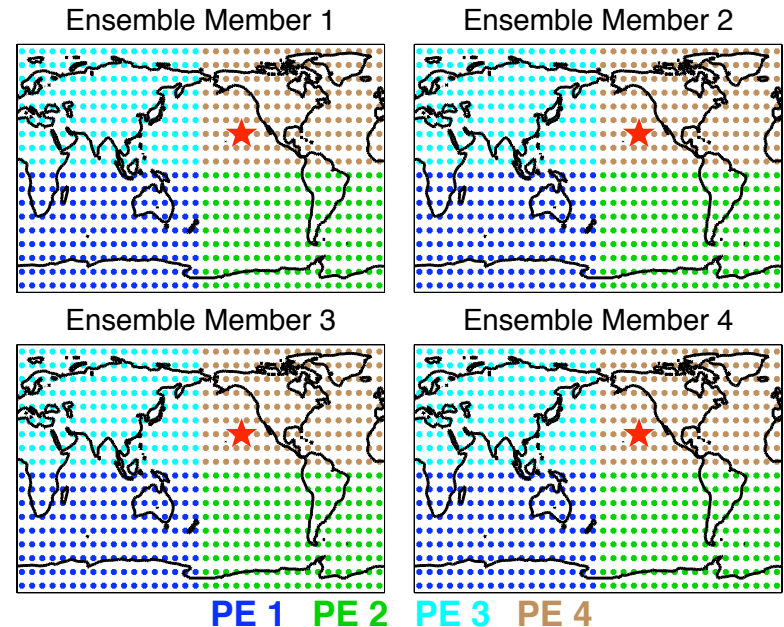

# Parallelizing Implementation of the Regression

Data layout (option 1):


Each process stores all ensemble copies of subset of state.

One PE broadcasts obs. increments.

All ensemble members for each state variable are on one PE.

Can compute state mean, variance without communication.

All state increments computed in parallel.

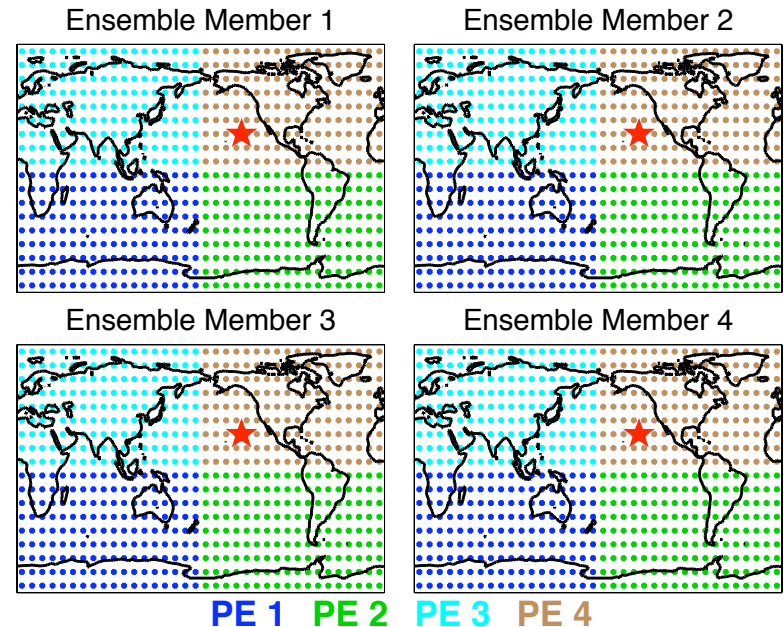

# Computing Forward Operators


Data layout (option 1):

Each process stores all ensemble copies of subset of state.

Computing forward operator,  $h$ ,  
is often local interpolation.

Most observations require no  
communication.

Those near boundaries or  
more complex operators  
require communication.

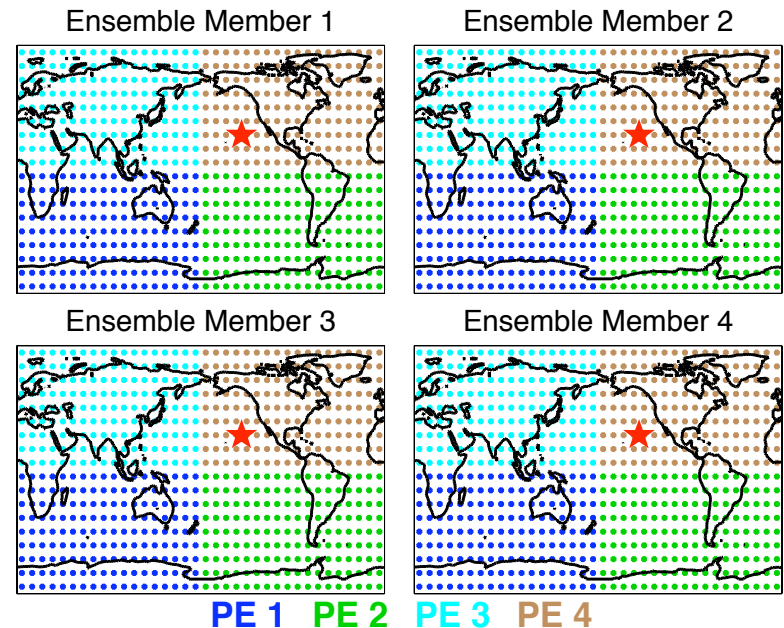




# Load Balancing Issues for Regression with Localization

Data layout (option 1):  
Each process stores all ensemble copies of subset of state.

Observation impact usually  
localized, reduces errors.

Observation in N. Pacific not  
expected to change Antarctic  
state.


**PE4** lots of work, **PE1** has none.

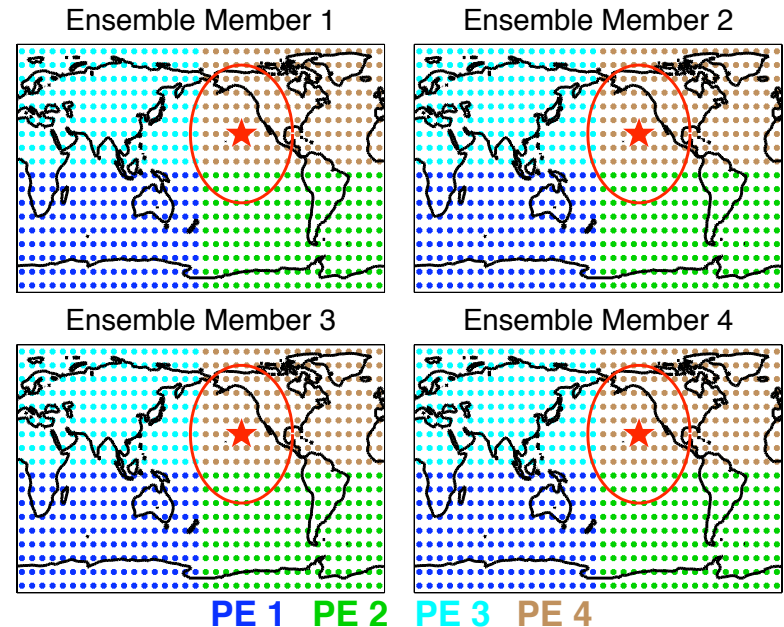

# Load Balancing Issues for Regression with Localization

Data layout (option 2):  
Each process stores all ensemble copies of subset of state.

Can balance load by  
'randomly' assigning state  
variables to PEs.

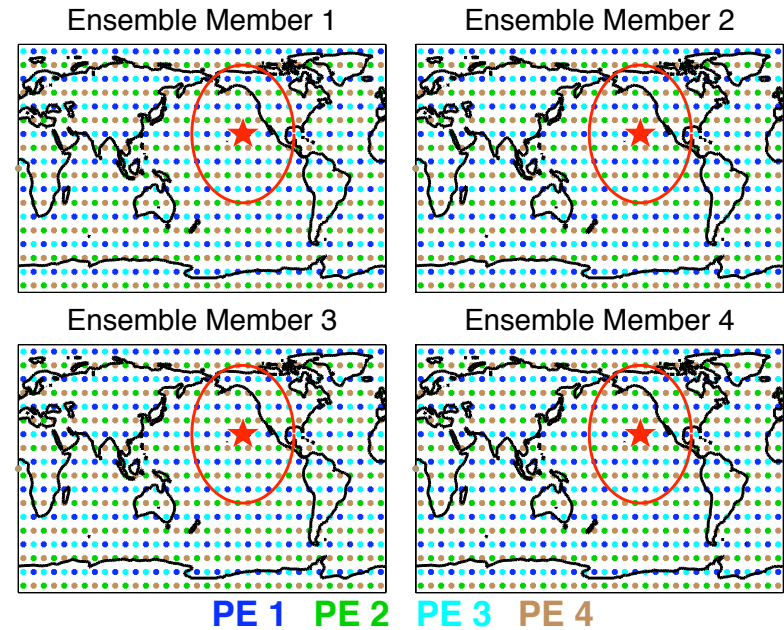


# Load Balancing Issues for Regression with Localization

Data layout (option 2):  
Each process stores all ensemble copies of subset of state.

Can balance load by  
'randomly' assigning state  
variables to PEs.


Now computing forward  
operators,  $h$ , requires  
communication.

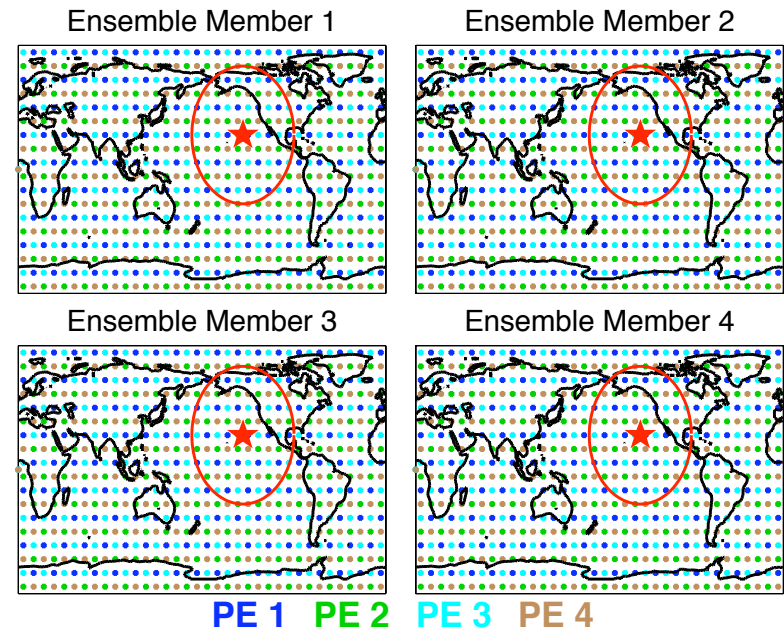

# Eliminating Communication for Forward Operators

Data layout (option 3):  
Entire state for each ensemble on single PE.

If each PE has a complete ensemble, forward operators require no communication.

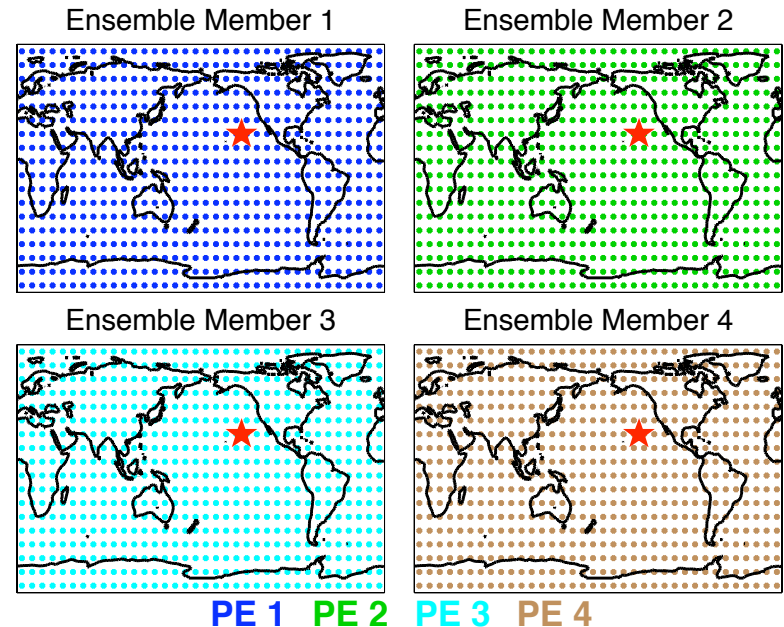


# Eliminating Communication for Forward Operators

Data layout (option 3):  
Entire state for each ensemble on single PE.

If each PE has a complete ensemble, forward operators require no communication.

Many forward operators could be done at once.

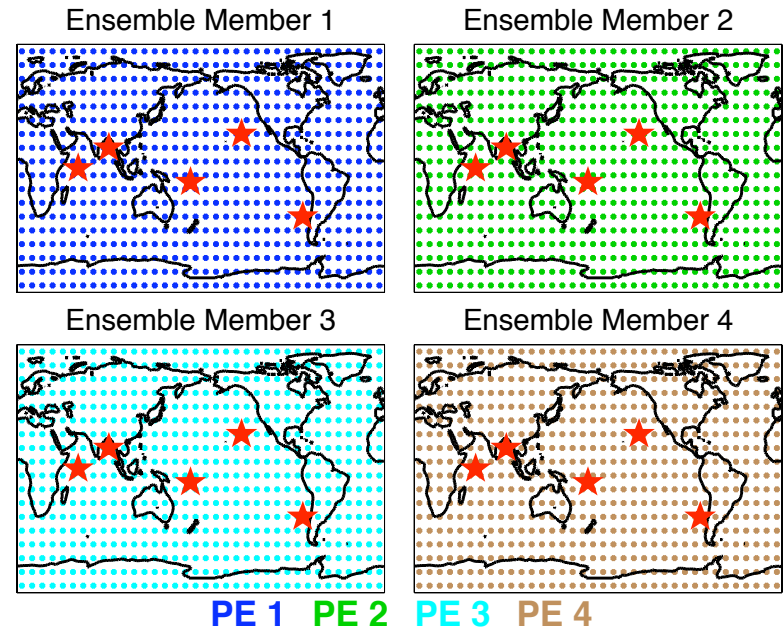


# Best of Both Worlds? Using a Data Transpose.

Two Data layouts:

Option 2 for regression, Option 3 for forward operators

Do a data transpose between options 3 and 2, using all to all communication.


Then do state increments for each observation sequentially.

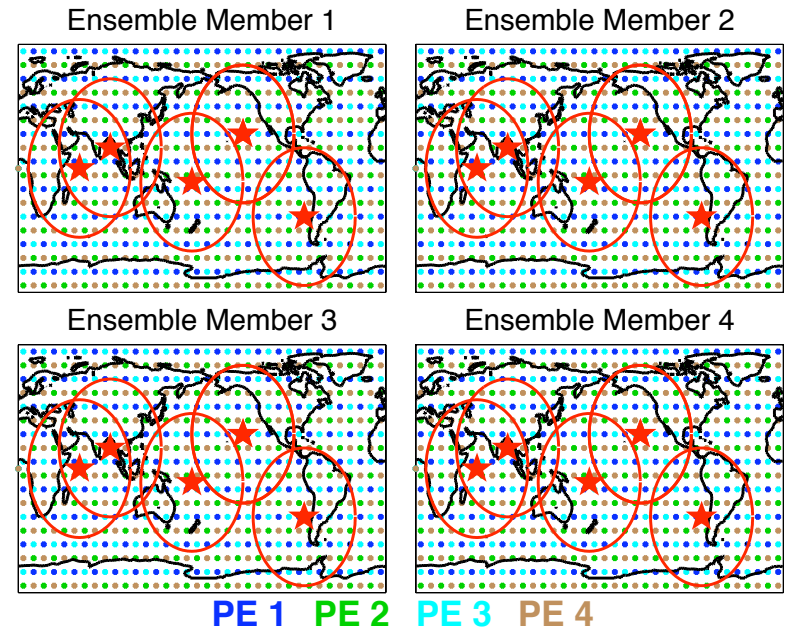


# Best of Both Worlds? Using a Data Transpose.

Two Data layouts:

Option 2 for regression, Option 3 for forward operators

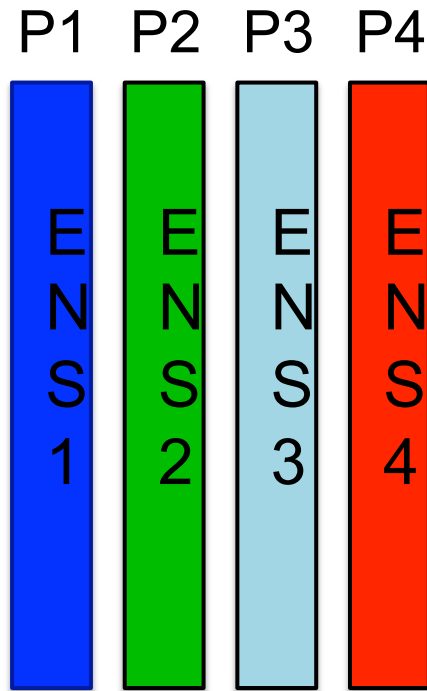


Whole model state available to a single processor.

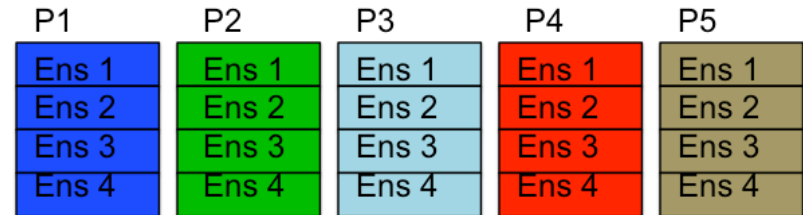

All copies of some variables available to a single processor

# Problems with Using a Data Transpose.

1. Lots of communication, have to move all the data.
2. Not memory scalable, whole state must fit on a PE.
3. Load balancing for forward operators.

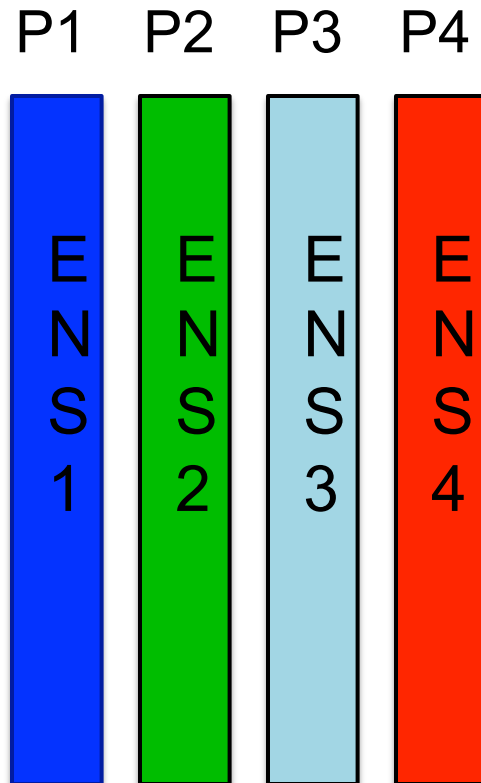


Ensemble size 4 example.  
4 tasks have a whole copy of  
the model state.

Other tasks have no data  
and nothing to do during  
forward operators.





Use MPI2 **one sided communication** to grab state elements for forward operators.

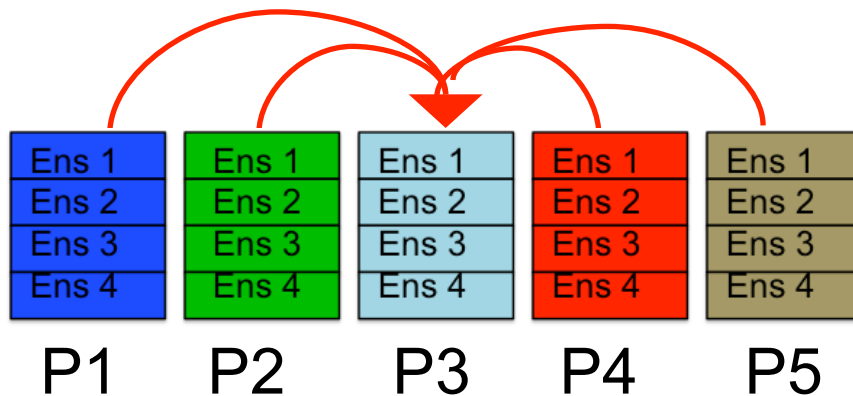


Reduces data movement.

Removes hard memory limit.

Allows **Vectorization** of forward operator calculations.

# MPI2 One Sided Communication

Have my process and a set of other processes.

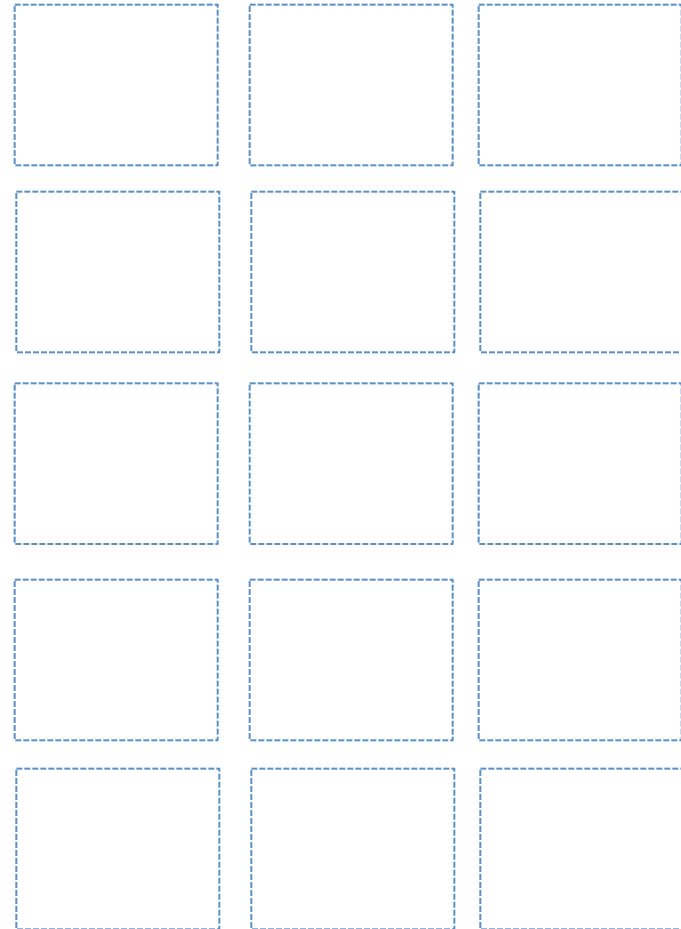

# MPI2 One Sided Communication


Have my process and a set of other processes.

Me


Everyone  
Else

# MPI2 One Sided Communication

Can place any of my data in a virtual window.

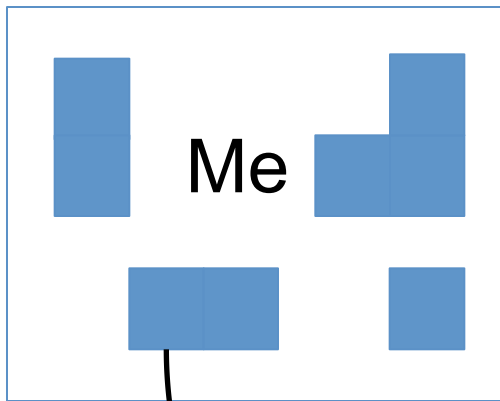


window

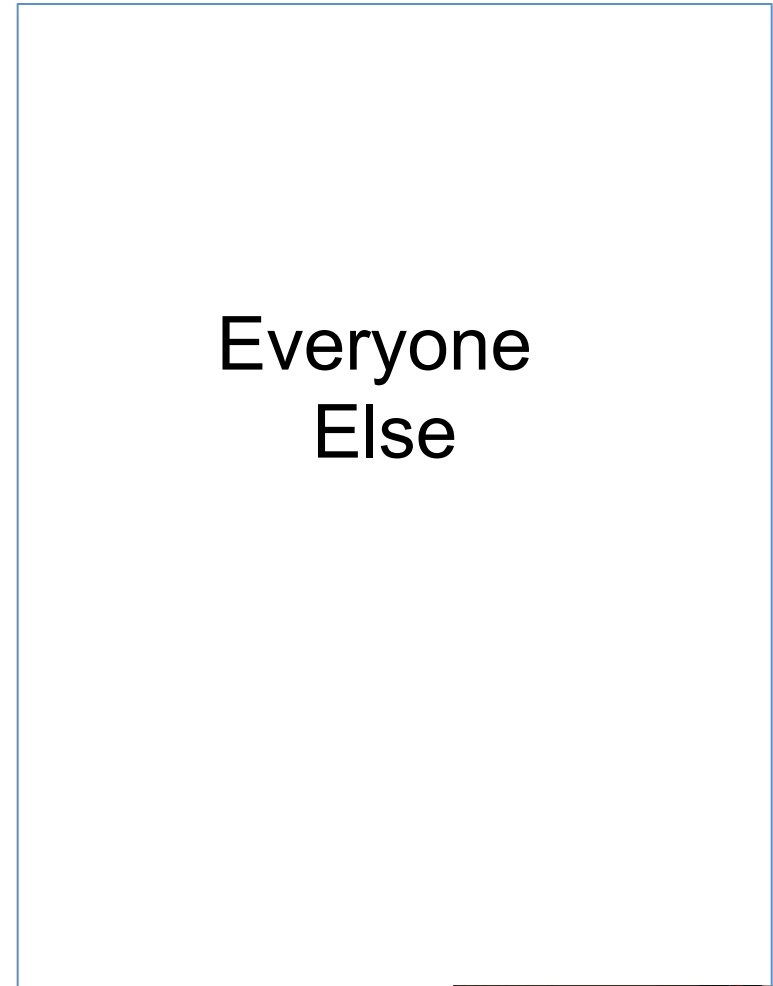


# MPI2 One Sided Communication

Any other task can asynchronously grab data in 'window'.

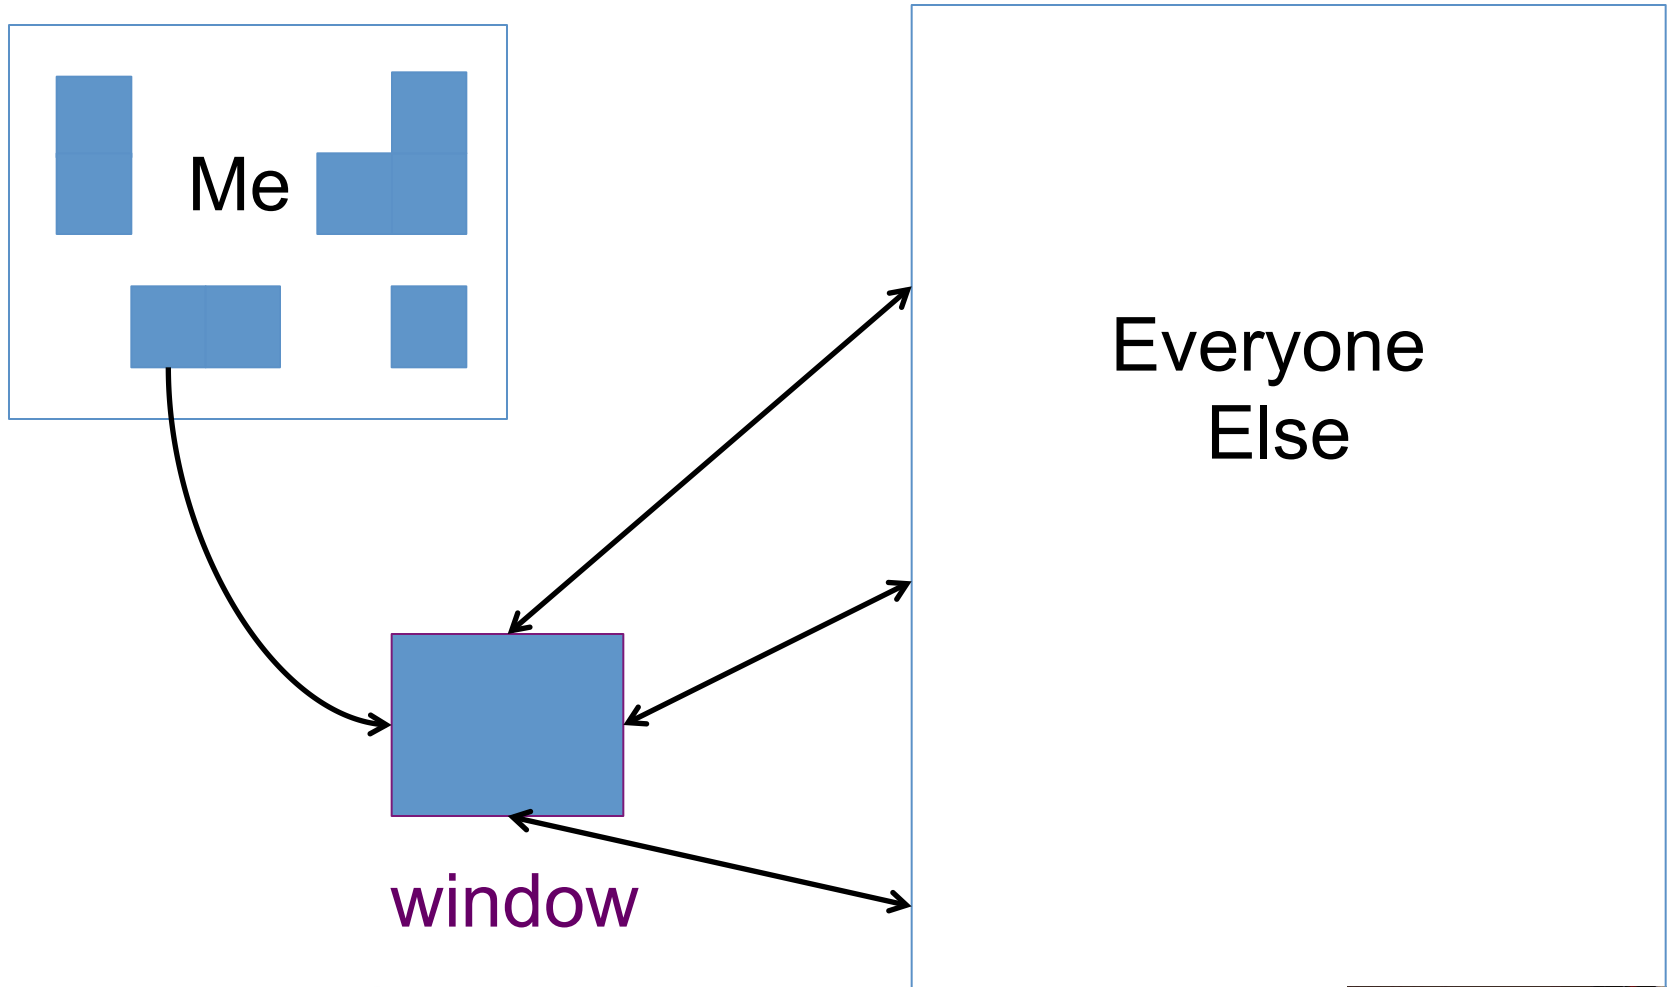


# MPI2 One Sided Communication

Memory scales for forward operators; allows large models.  
Computation of forward operators also scales and balances.

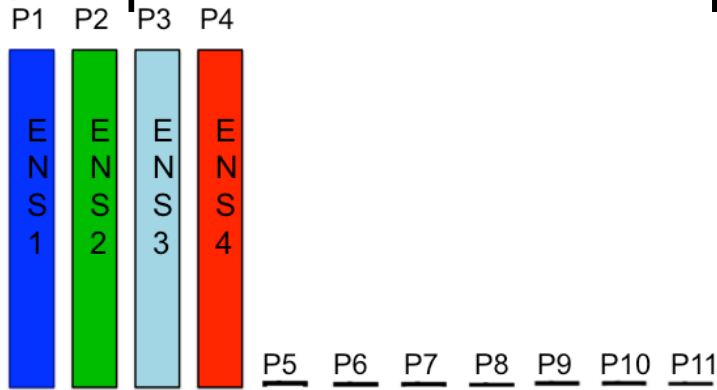

Old: 4 tasks doing  
all observations  
for 1 copy.



New: Lots of tasks doing some  
observations for all copies.  
Vectorizes, too.

# WRF (regional weather forecast model) Results

## Example problem specification:

- 184 million model state variables
  - 1.5 GB per ensemble member
- 50 Ensemble members
- $O(100,000)$  observations


# WRF (regional weather forecast model) Results

## Hardware specification:

- NCAR's Yellowstone:
  - Intel Sandybridge
  - 16 cores per node
  - 25 GB usable memory per node




# WRF Results: Memory Scaling

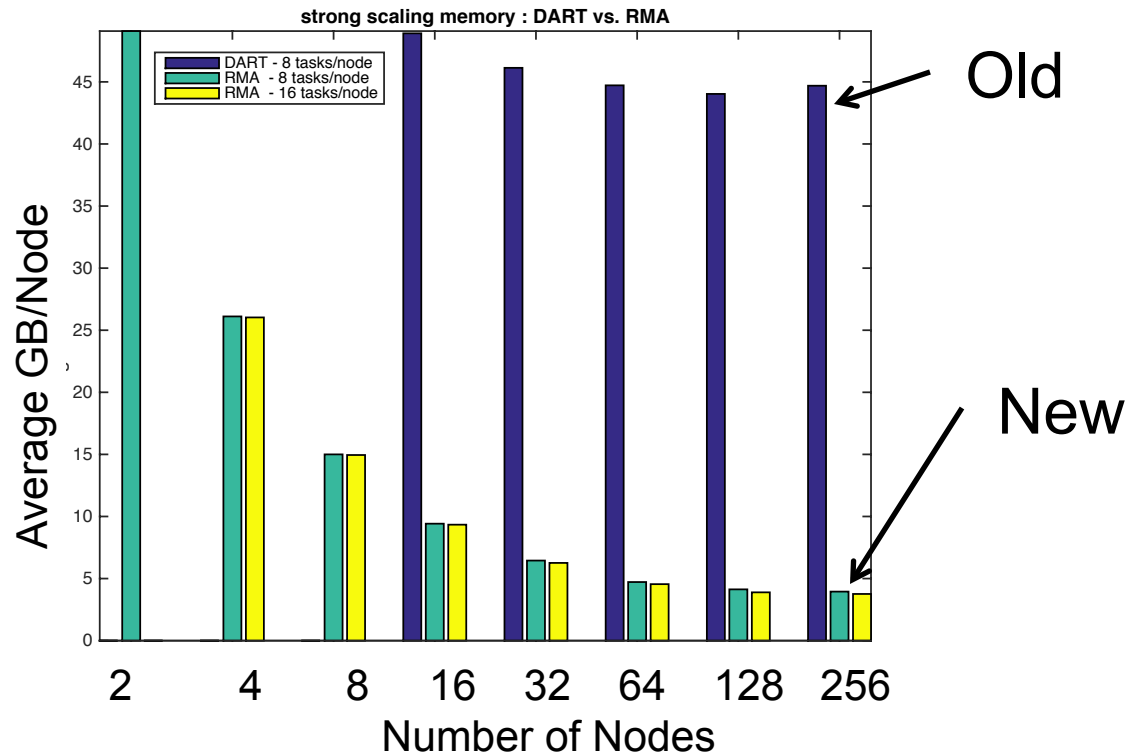

Original DART 8 tasks/node max.  
New (RMA) version memory scales far better.


# WRF Results: Computational Scaling for Assimilation

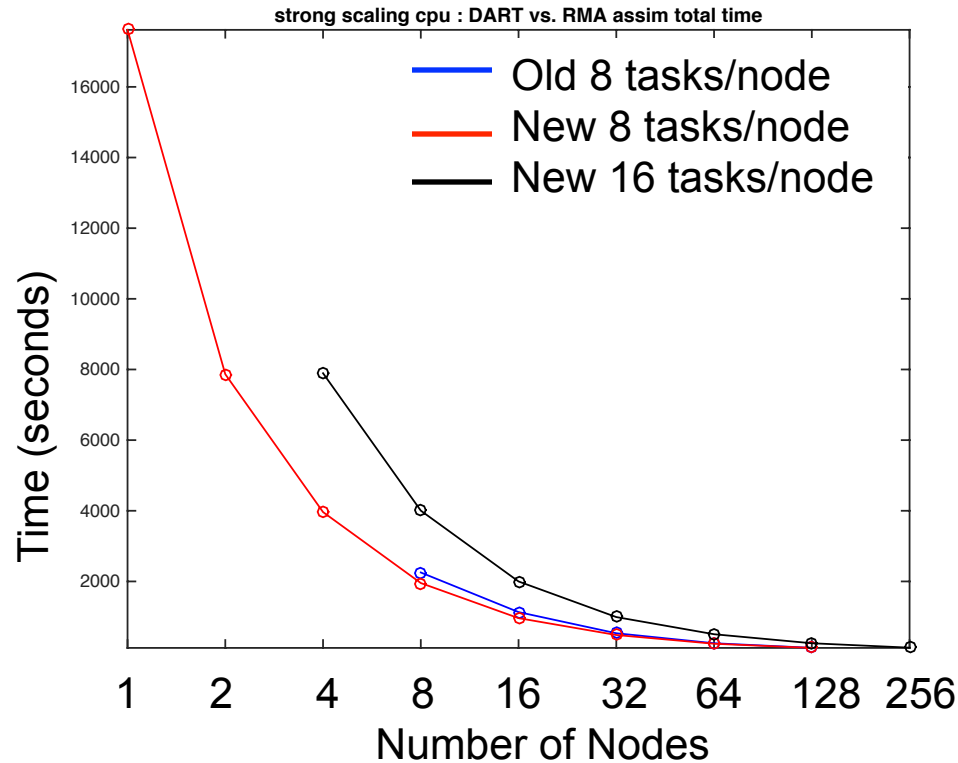

Very similar with 8 tasks per node.

New with 16 tasks/node slightly slower (memory overhead)

# WRF Results: Bonus, I/O Scaling Improves

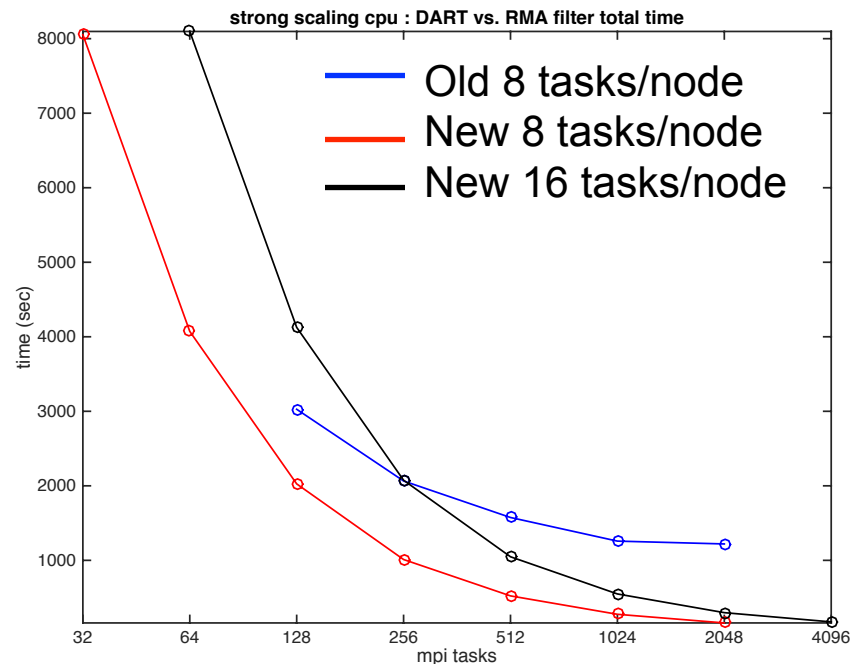

**Total** time scales much better for new (RMA).  
Almost all due to writing separate output from each node.  
Not gathering and doing single write.


# Making Effective Use of Coprocessors

Focus on Specific Routines with Favorable Characteristics:

- High number of floating point instructions,
- Reasonably high floating point instructions per load/store,
- Isolated code – each process works on its own local data,
  - Can develop on one node, but apply to multinode runs.


# Making Effective Use of Coprocessors

## Example: subroutine get\_close

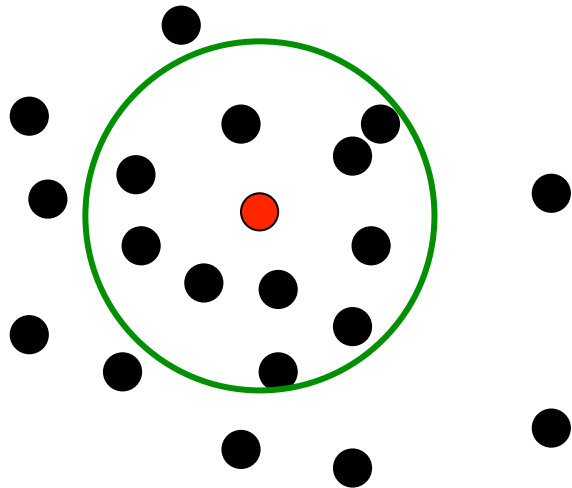

For a **given observation** computes:

## Example: subroutine get\_close

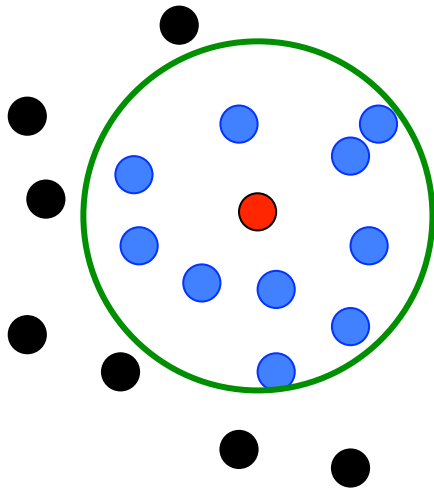


For a **given observation** computes:

- ■ Number of state variables (or obs) within the **localization radius**,
- ■ Distances to **close state variables**,
- ■ Indices of the close states.

# Making Effective Use of Coprocessors

GPU Algorithm for `get_close`:


Implemented in CUDA Fortran for NVIDIA GPUS by Ye Feng

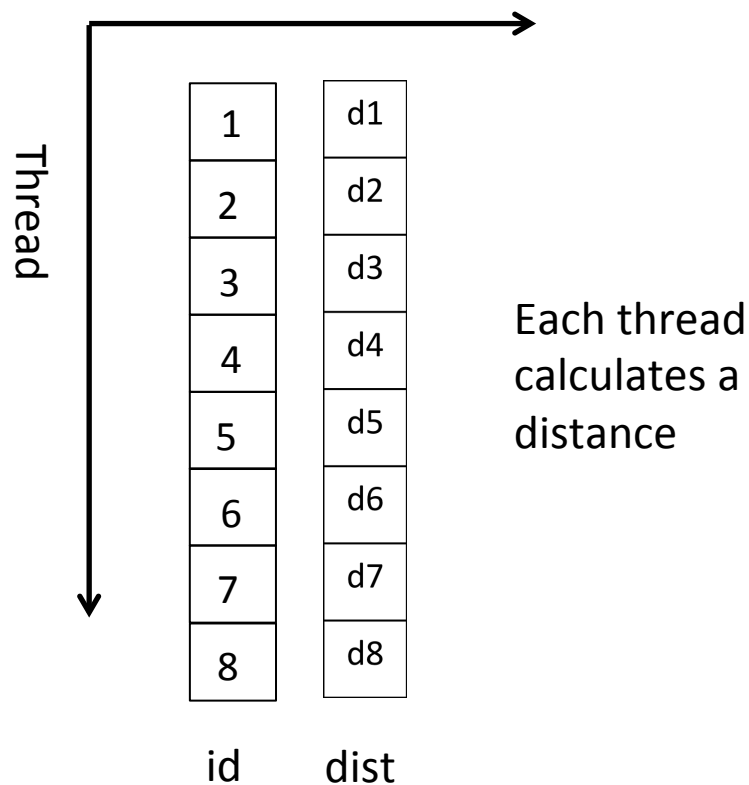

Key idea for GPU implementation **reduce branching.**

# Making Effective Use of Coprocessors

GPU Algorithm for `get_close`:

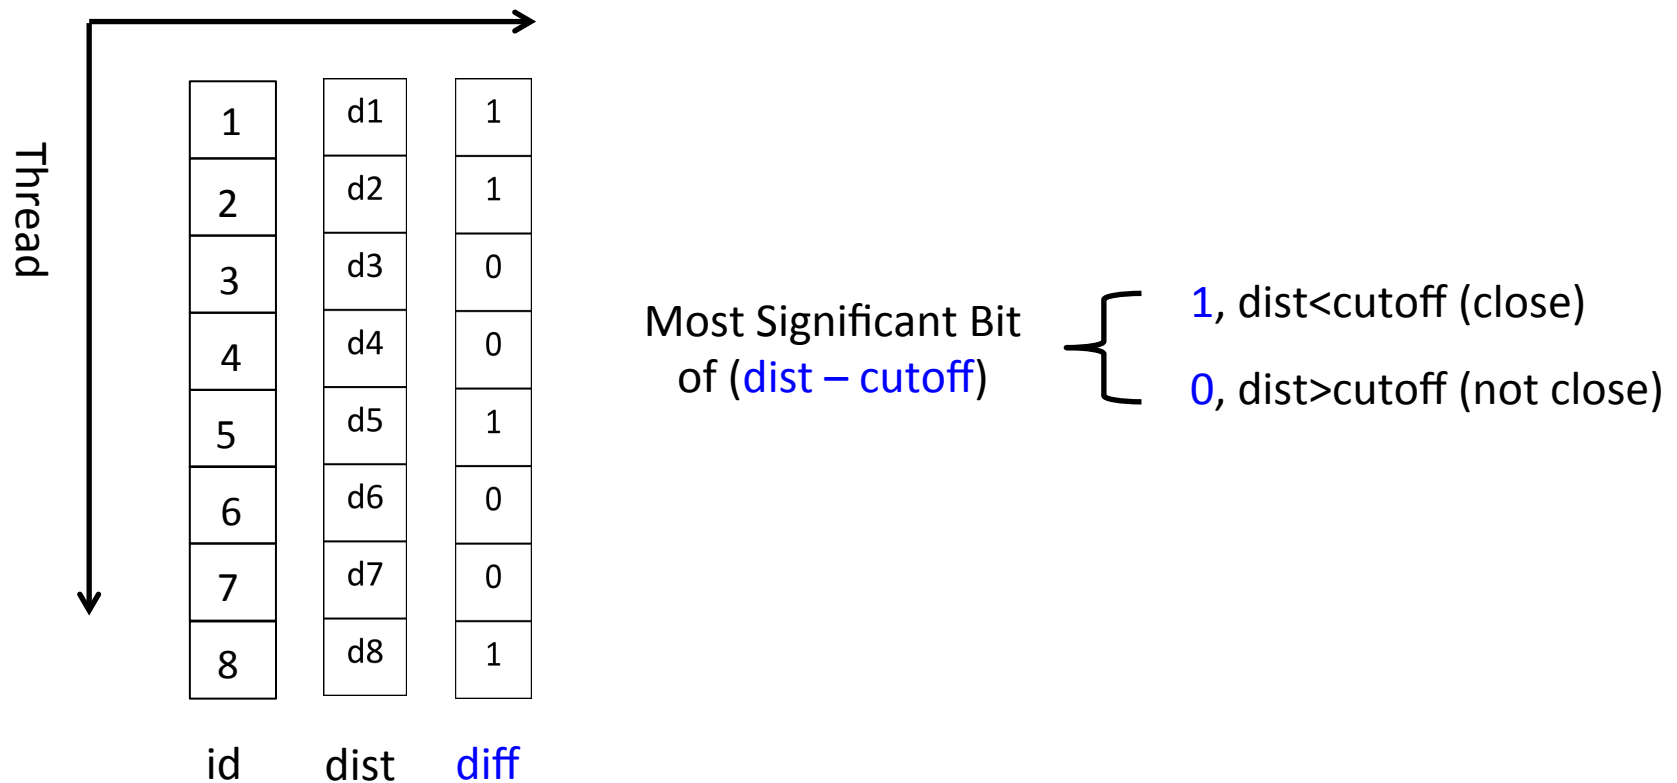


Key idea for GPU implementation **reduce branching**



# Making Effective Use of Coprocessors


GPU Algorithm for get\_close:

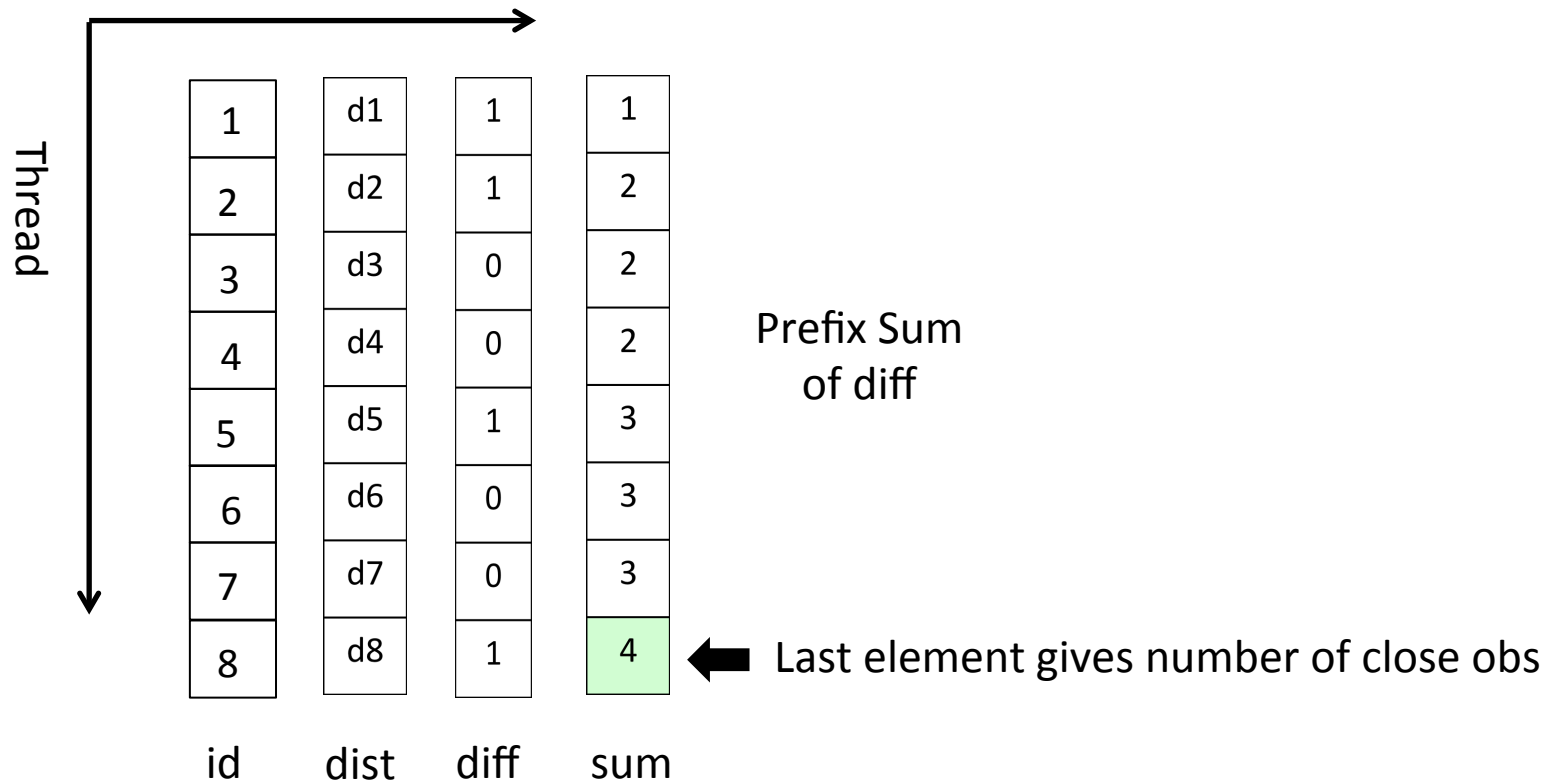

Key idea for GPU implementation **reduce branching**

# Making Effective Use of Coprocessors


GPU Algorithm for get\_close:

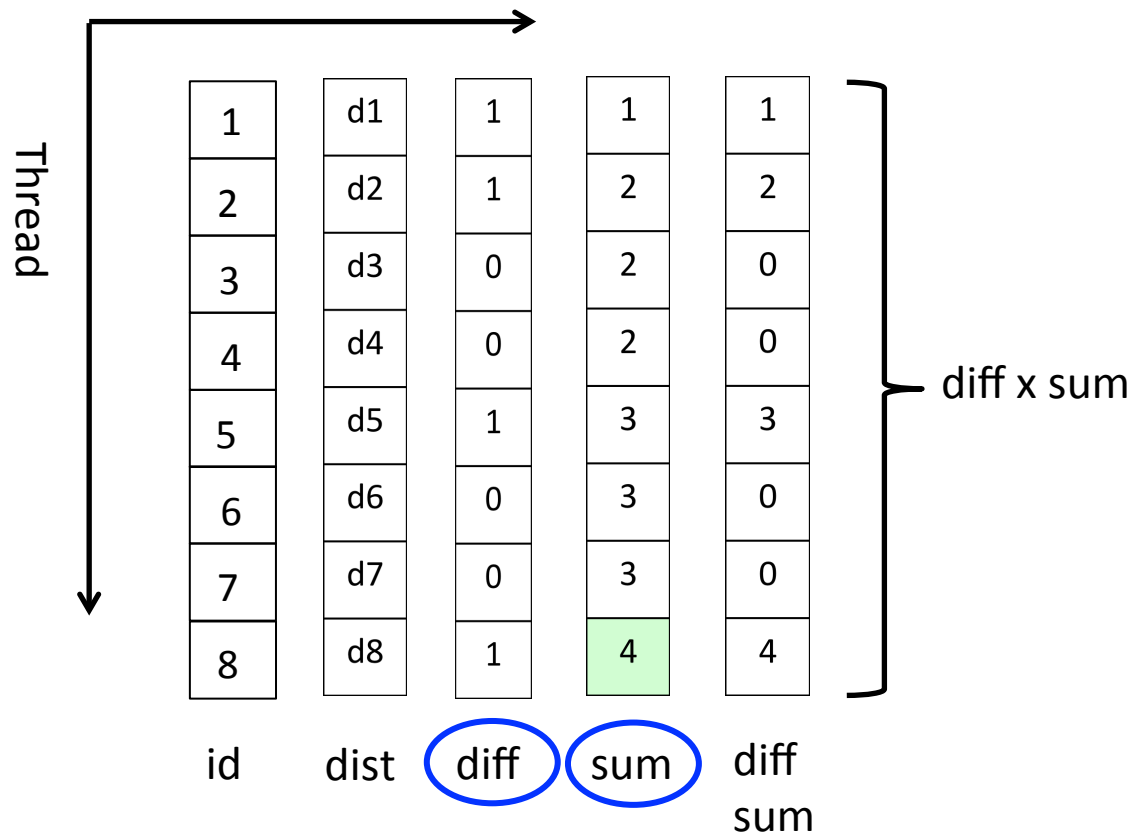

Key idea for GPU implementation **reduce branching**

# Making Effective Use of Coprocessors


GPU Algorithm for get\_close:

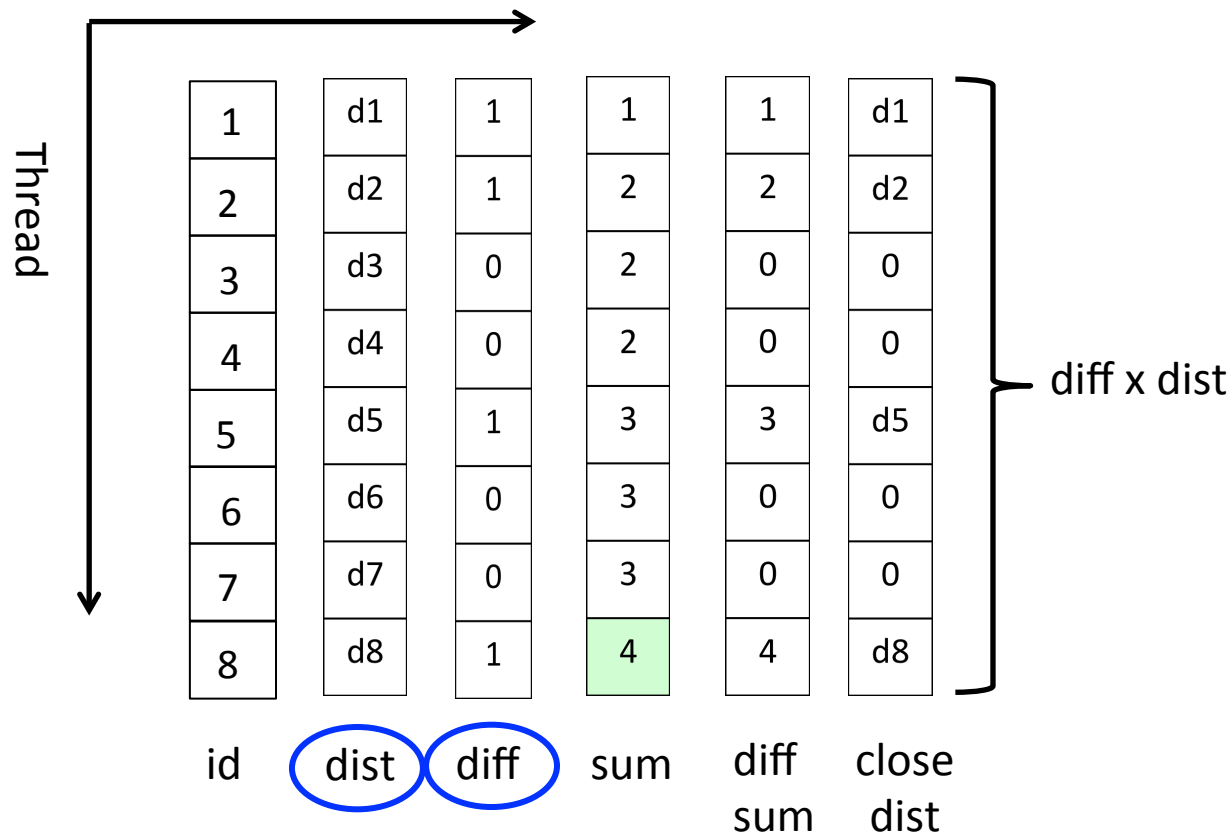

Key idea for GPU implementation **reduce branching**

# Making Effective Use of Coprocessors


GPU Algorithm for get\_close:

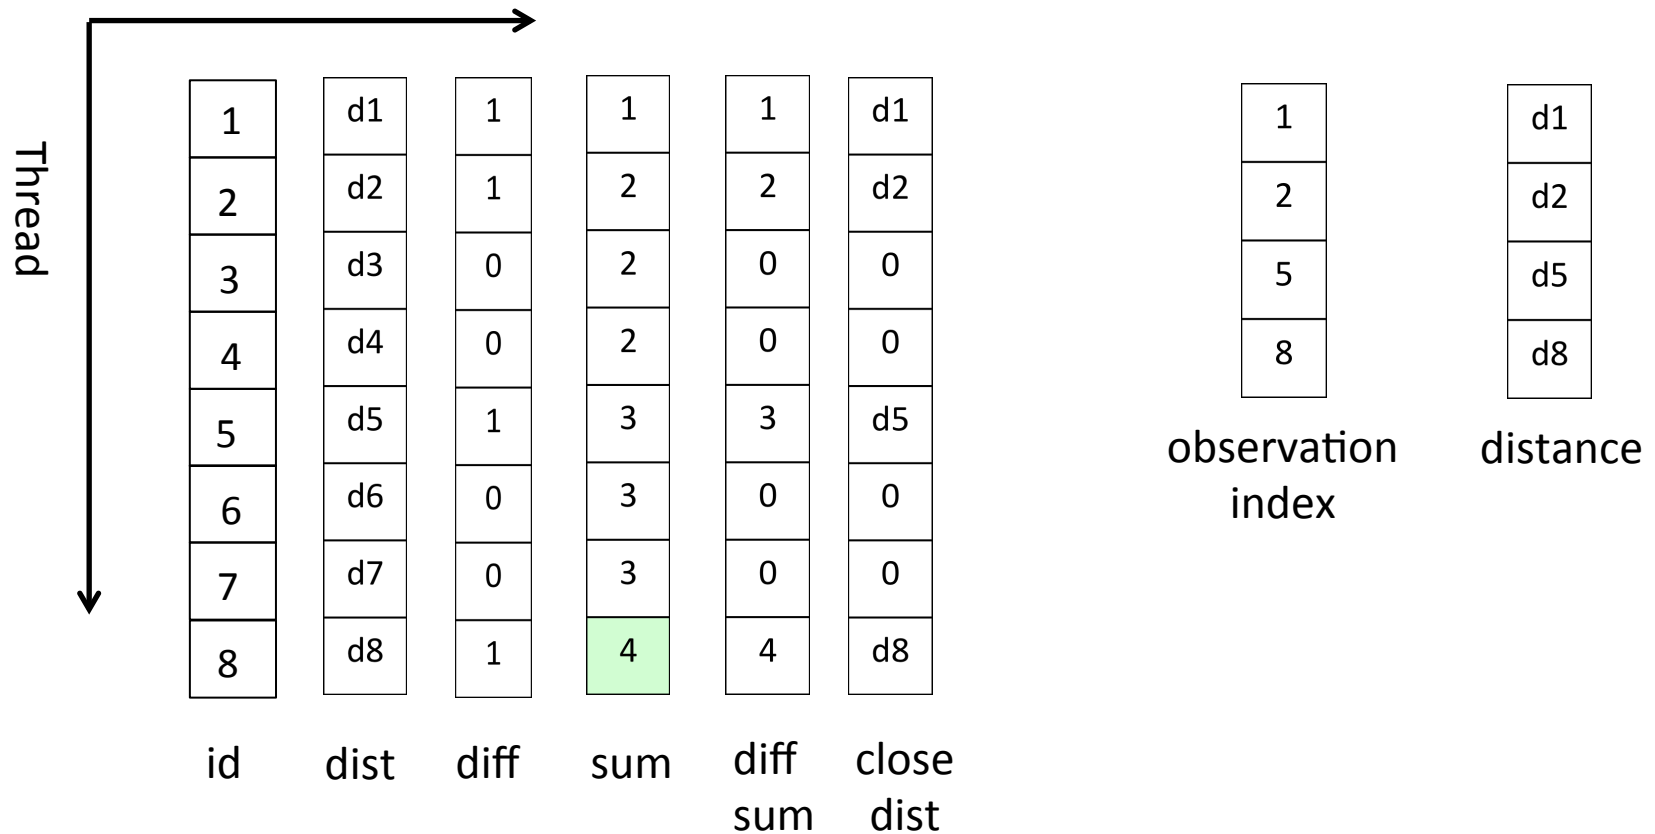

Key idea for GPU implementation **reduce branching**

# Making Effective Use of Coprocessors


GPU Algorithm for get\_close:

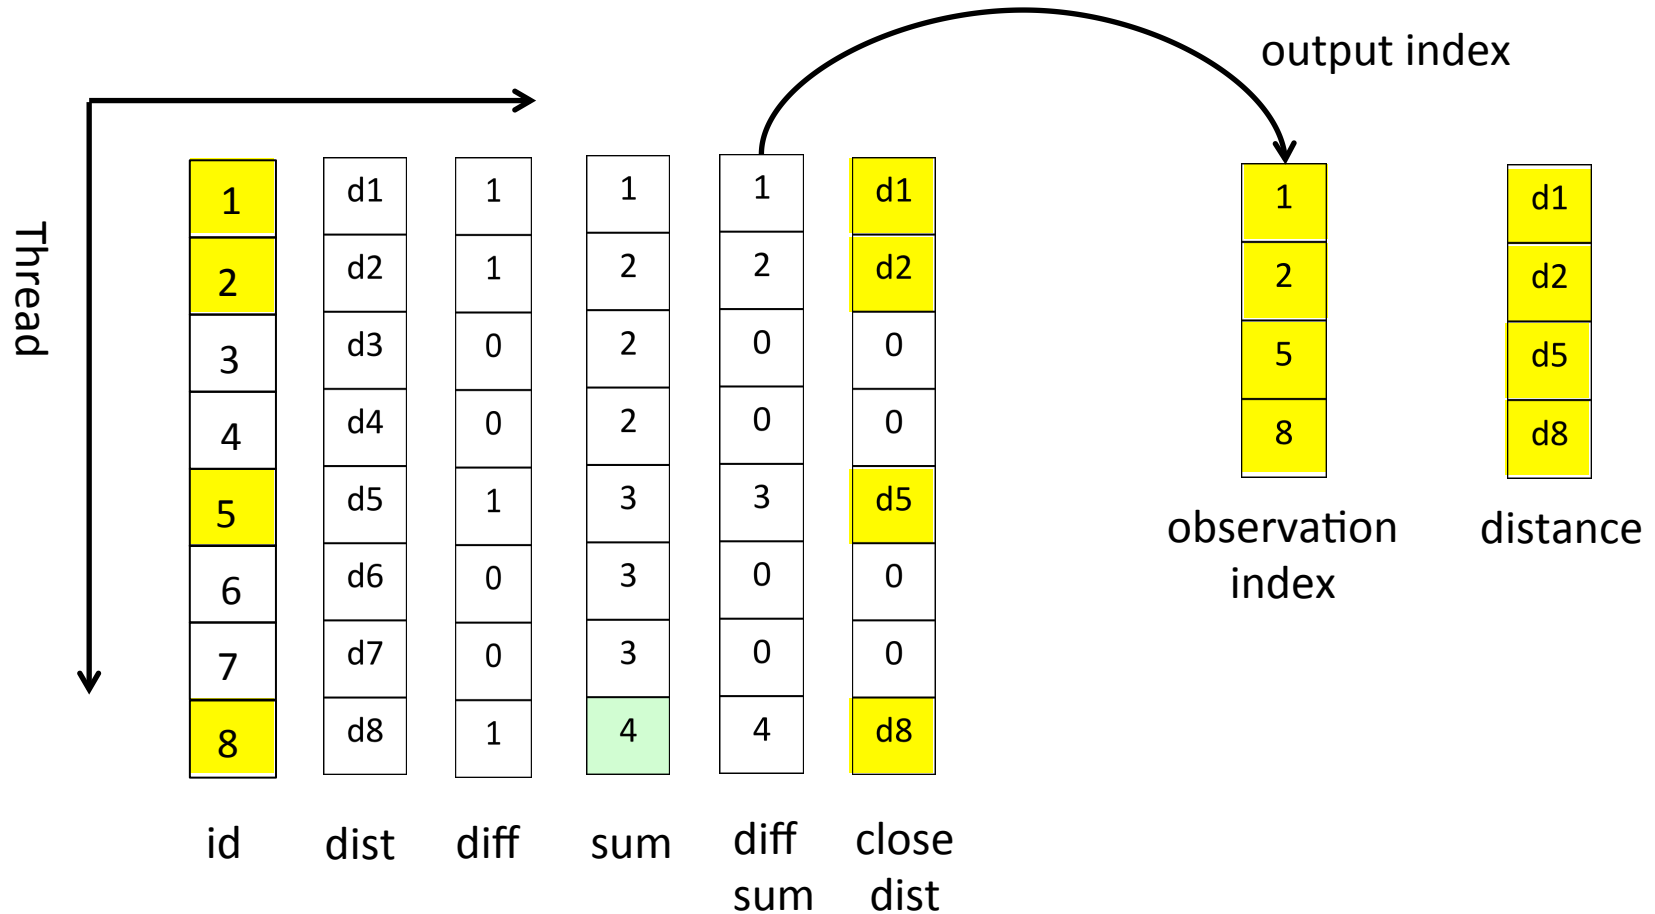

Key idea for GPU implementation **reduce branching**

# Making Effective Use of Coprocessors

## GPU Speedup Nvidia Quadro K5000

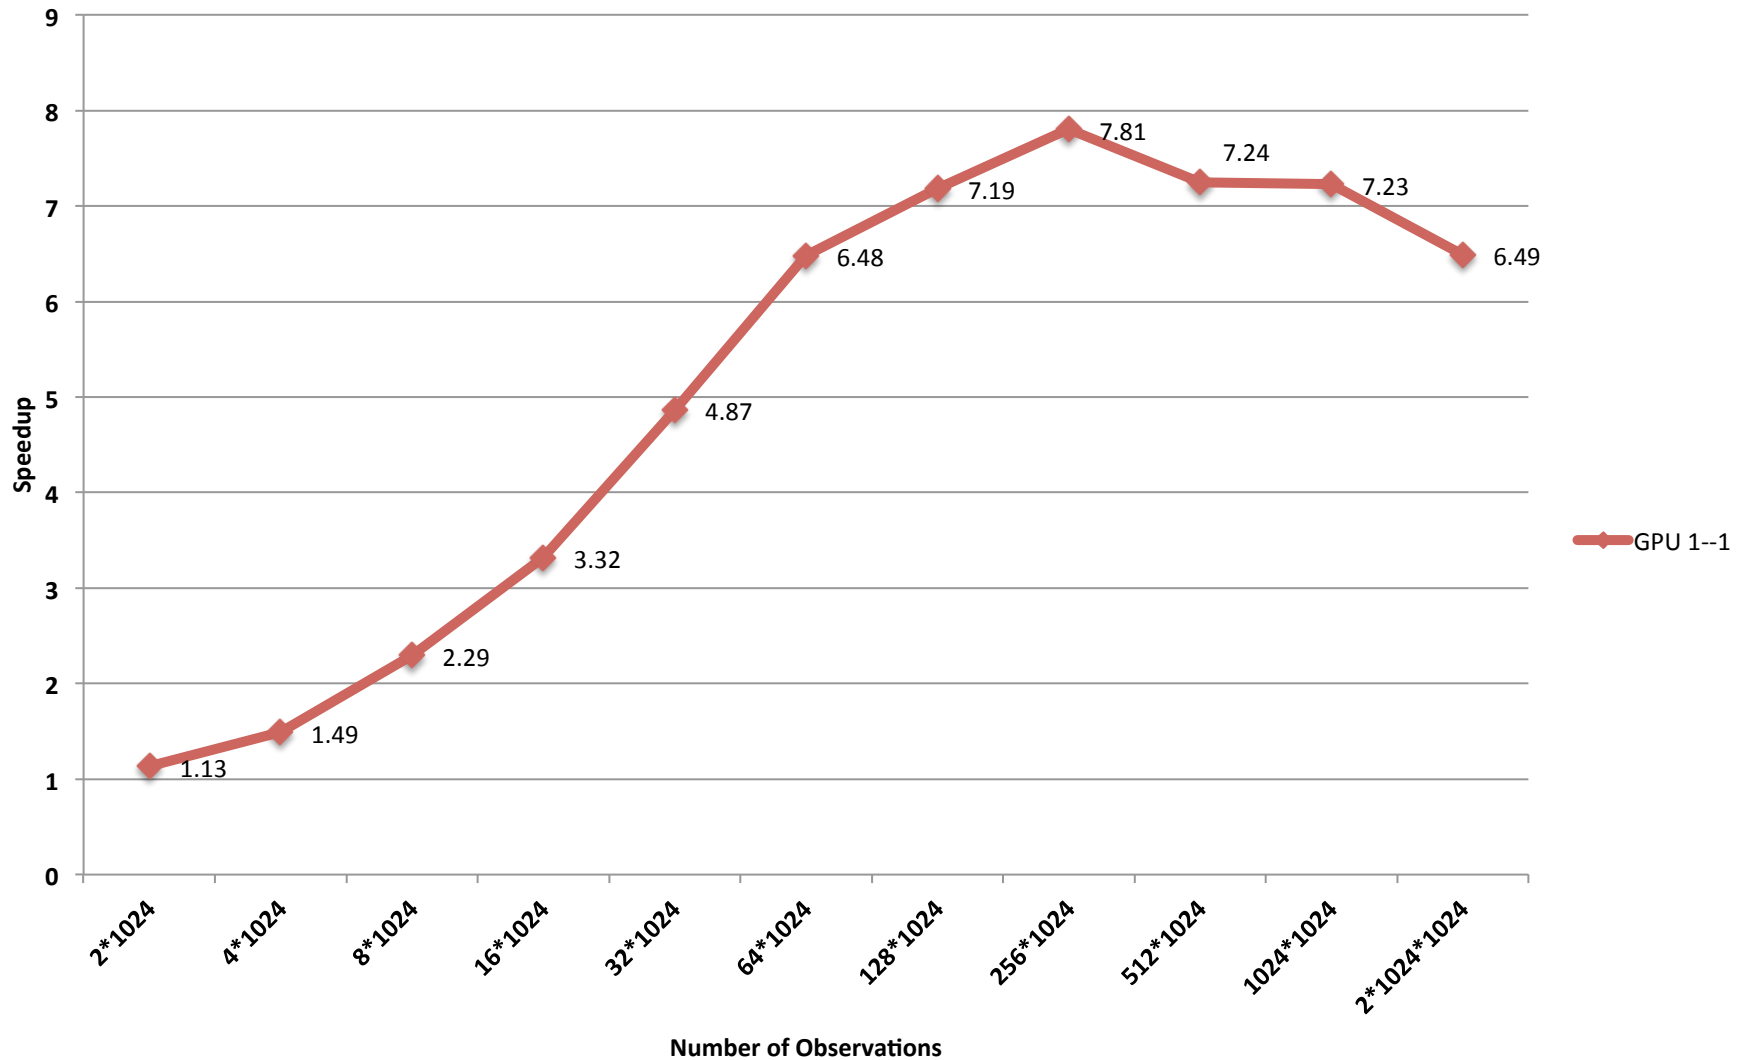

# Conclusions

- General purpose ensemble filters can scale well to many processes.
- Large geophysical problems can scale easily to  $O(10000)$  processes.
- General purpose facility must support flexible data distribution.
- IO is fast becoming the biggest bottleneck.
- Efficient use of coprocessors may be possible.
- A parallel implementation simulation facility is useful.

# Learn more about DART at:



[www.image.ucar.edu/DAReS/DART](http://www.image.ucar.edu/DAReS/DART)

dart@ucar.edu

Anderson, J., Hoar, T., Raeder, K., Liu, H., Collins, N., Torn, R., Arellano, A., 2009: *The Data Assimilation Research Testbed: A community facility.*

BAMS, **90**, 1283—1296, doi: 10.1175/2009BAMS2618.1

